

# Data Transfer Object (DTO)

ISEP / LETI / ESOFI

# Topics

- Data Transfer Object (DTO)
  - Providing a list of objects to the UI Layer
  - Sending data from the UI do the Domain Layer
- Mappers

# DTO Pattern

- **Problem**

- How to carry data from one element of the system (e.g. layer, component) to another, **reducing coupling** and/or meeting other qualities/needs (such as hiding some attributes)?

- **Solution**

- Create a **Data Transfer Object (DTO)** holding all the data required to fulfill the intended purpose
- Typically, a third object (called a **Mapper** or Assembler) is used to convert the original data (e.g. objects from the Domain Layer) to the DTO and vice-versa
- The DTO must not have any business logic or behavior
- The DTO is just a **bag of data** and therefore its attributes can be public and no *getters* and *setters* are needed


# Applying DTO

- From the Domain Layer to the UI Layer (UI  $\leftarrow$  Domain)
  - When **providing a list of objects** for the user to select one (or more)
  - When **providing a report** whose content aggregates and/or summarizes data spread across several domain objects
- From the UI Layer to the Domain Layer (UI  $\rightarrow$  Domain)
  - When **sending user-inputted data to the domain** and the controller's method takes more than four or five parameters (e.g. creating a new client with several attributes)
- From the Domain Layer to a Persistence Layer
  - When dealing with the requirement: "The application should use object serialization to ensure data persistence between two runs of the application."
  - *Note: For now, do not consider this while designing the system*


# From the Domain Layer to the UI Layer

Providing a list of objects for the user to select one (or more)


# UI ← Domain: Providing a List of Domain Objects (1/4)

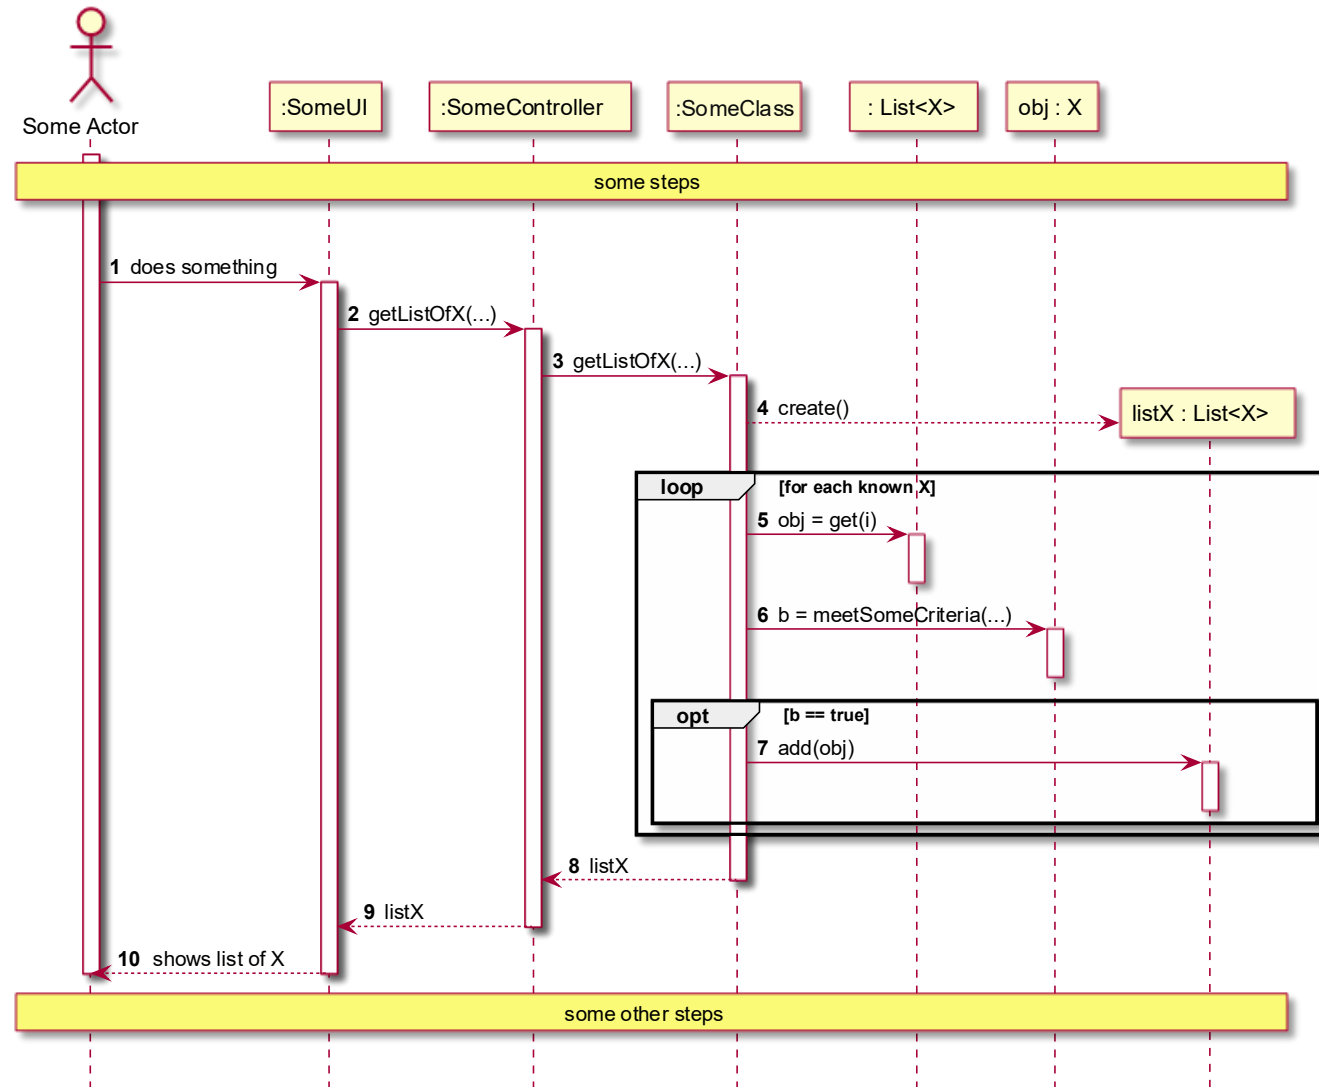

# UI ← Domain: Providing a List of Domain Objects (2/4)

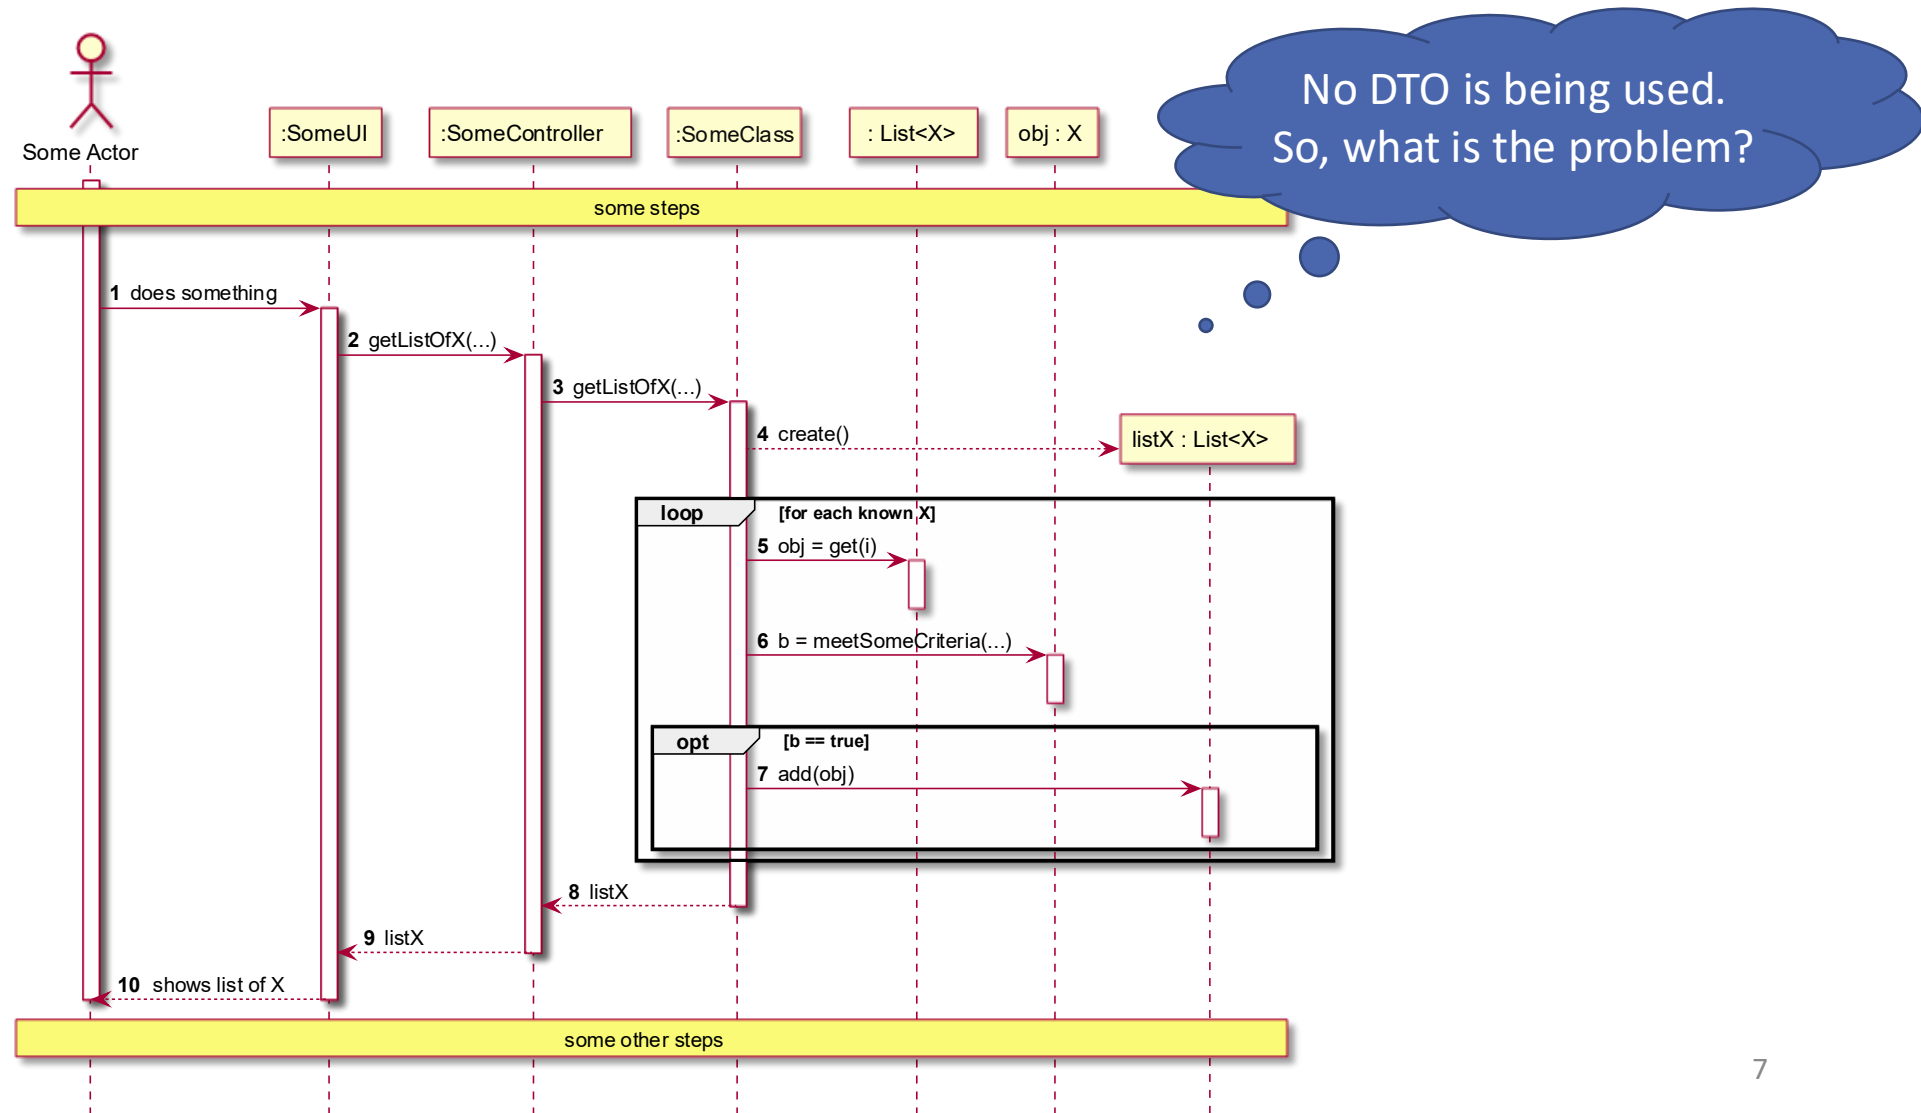


# UI ← Domain: Providing a List of Domain Objects (3/4)

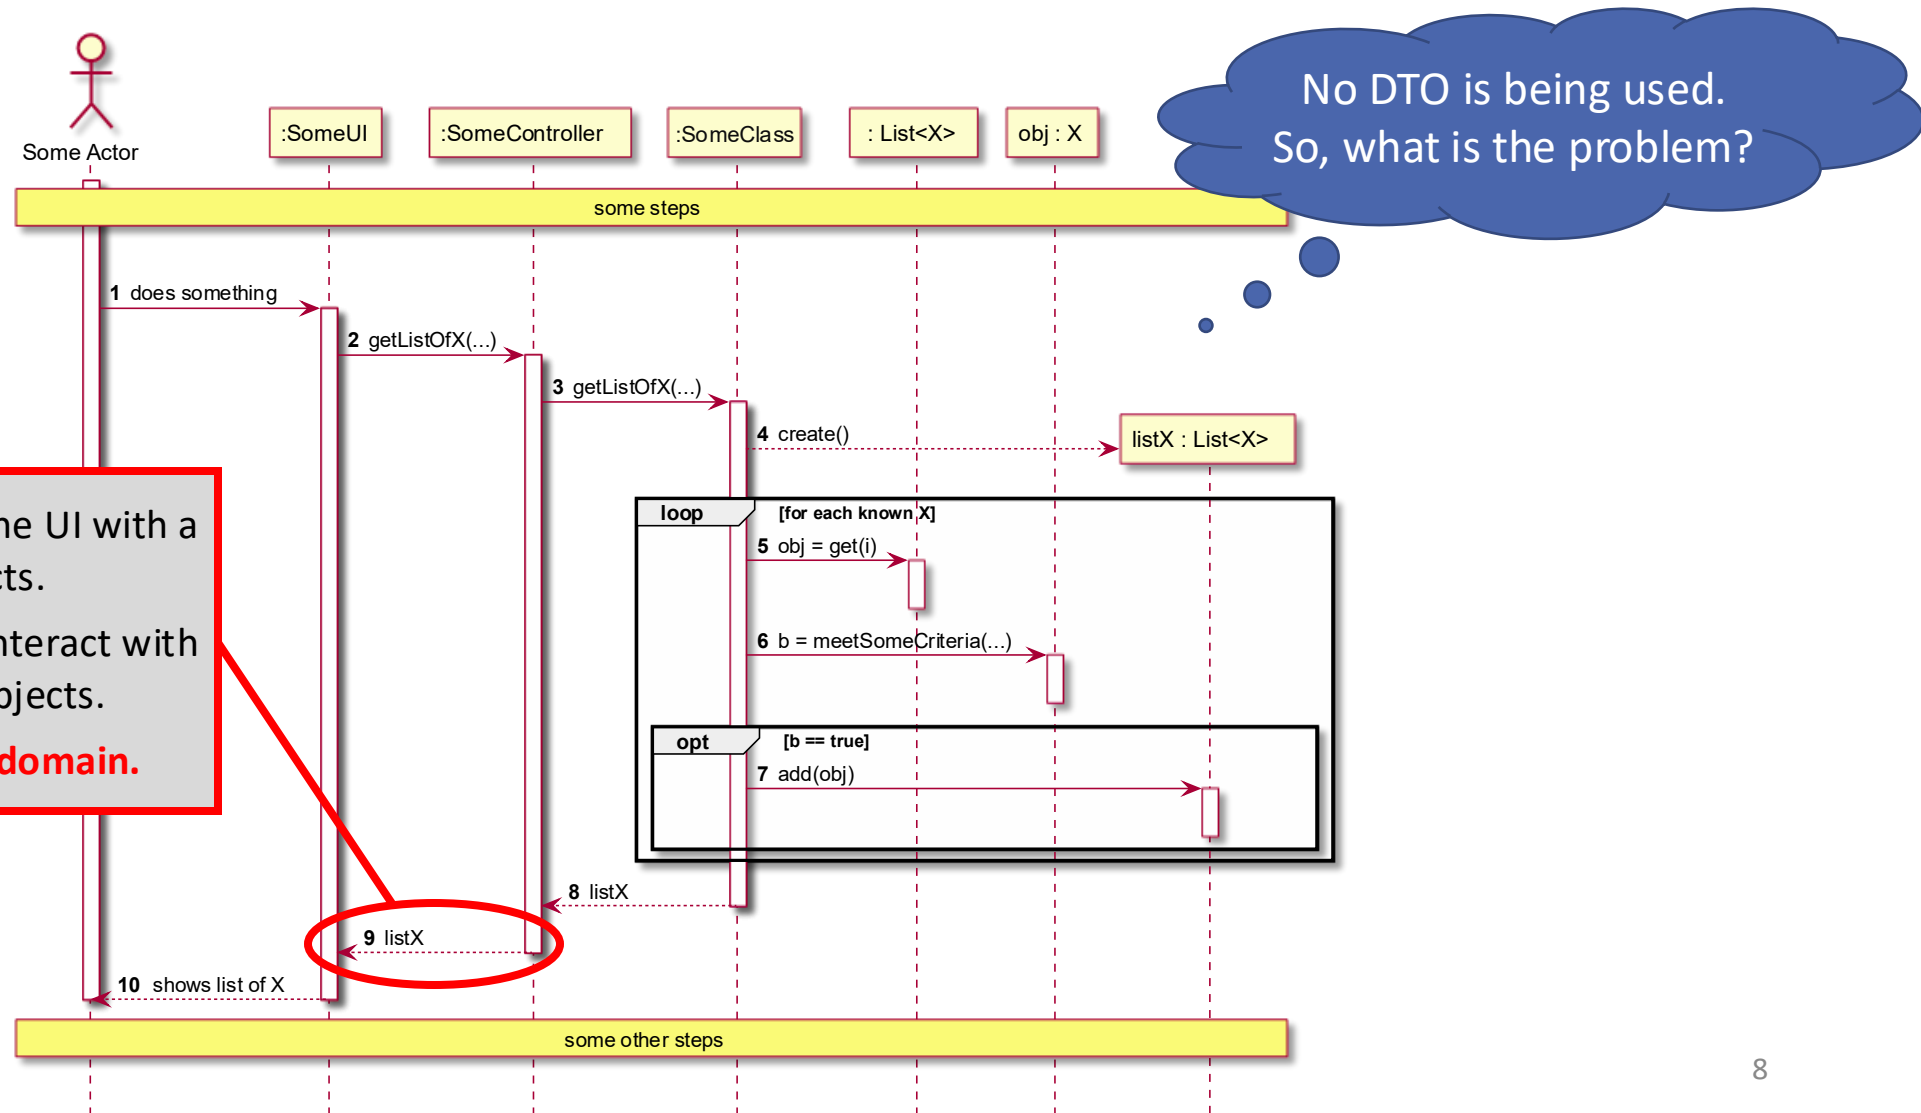


The Controller is providing the UI with a list of domain objects.  
This means that the UI can interact with the received domain objects.  
**The UI is coupled to the domain.**



# UI ← Domain: Providing a List of Domain Objects (4/4)

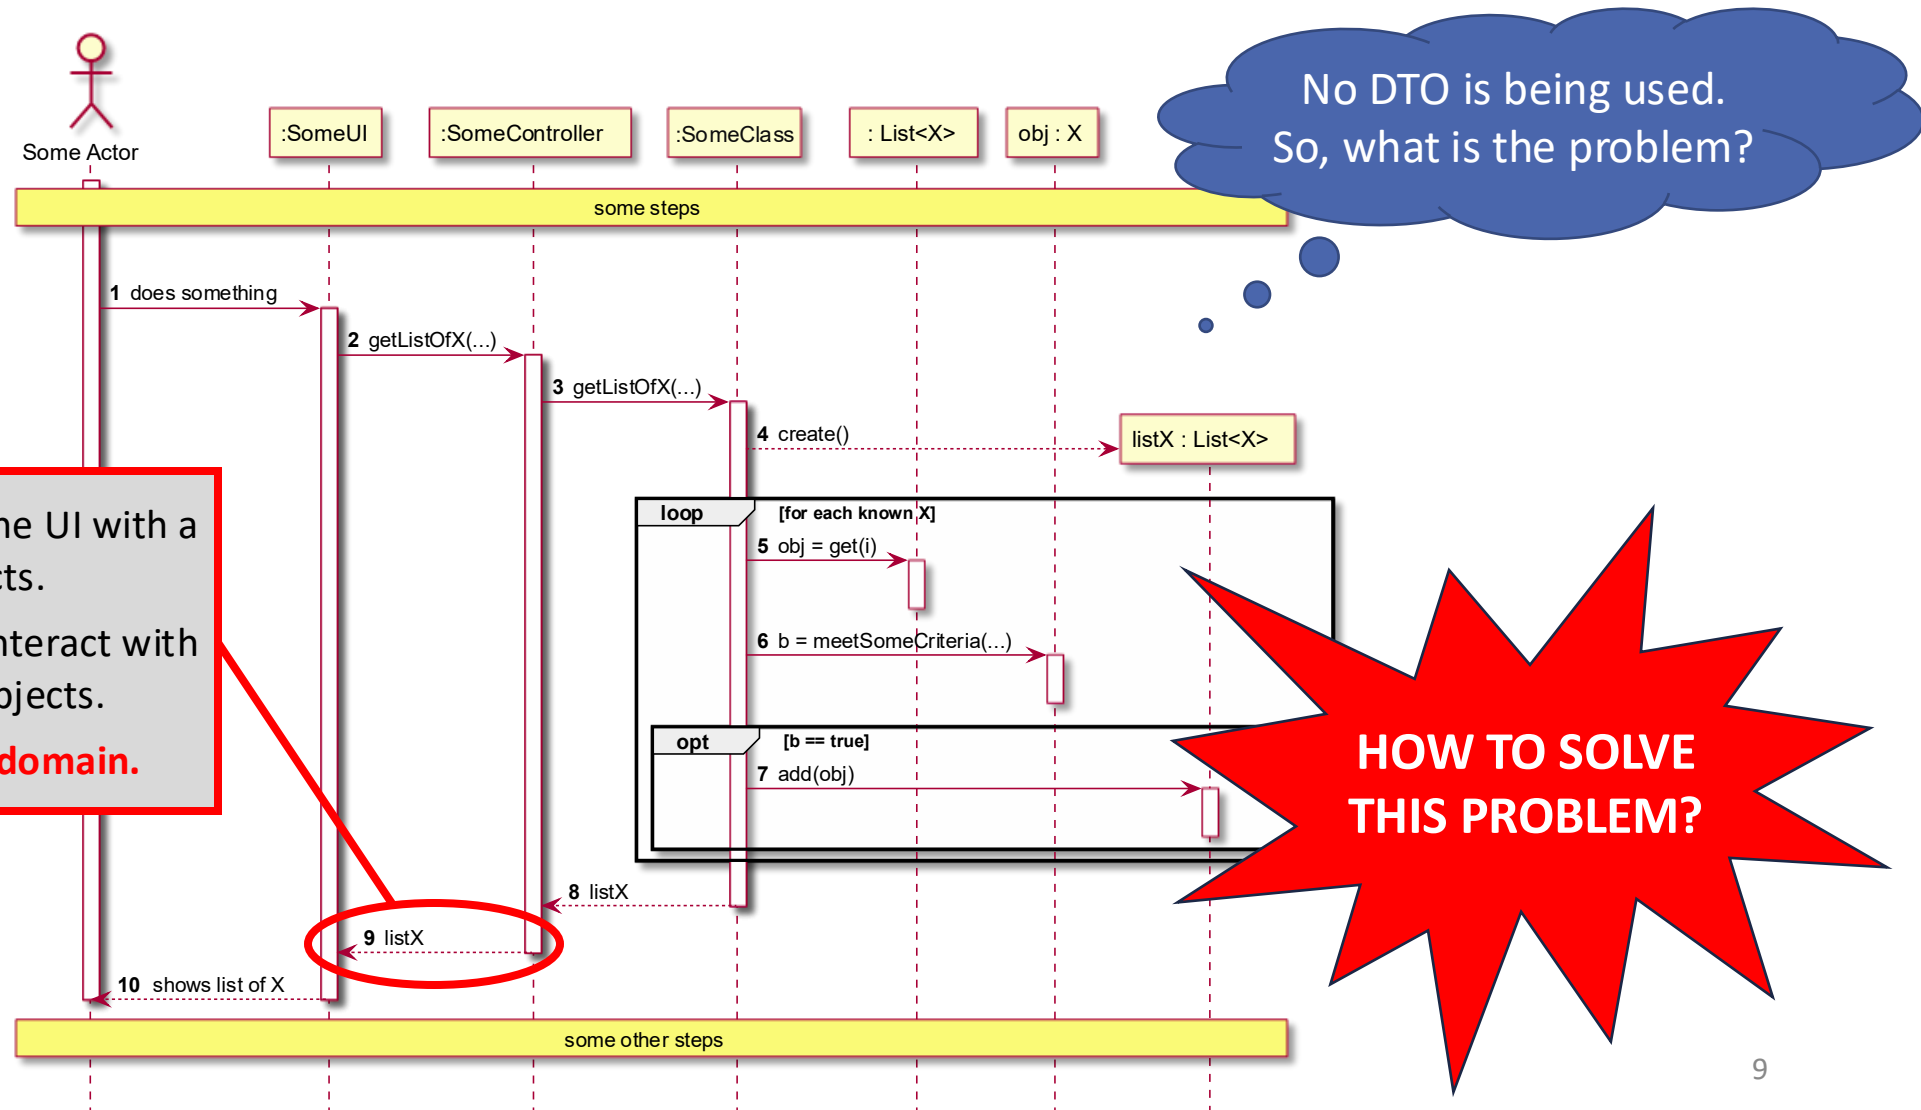


# UI ← Domain: Providing a List of DTO (1/2)

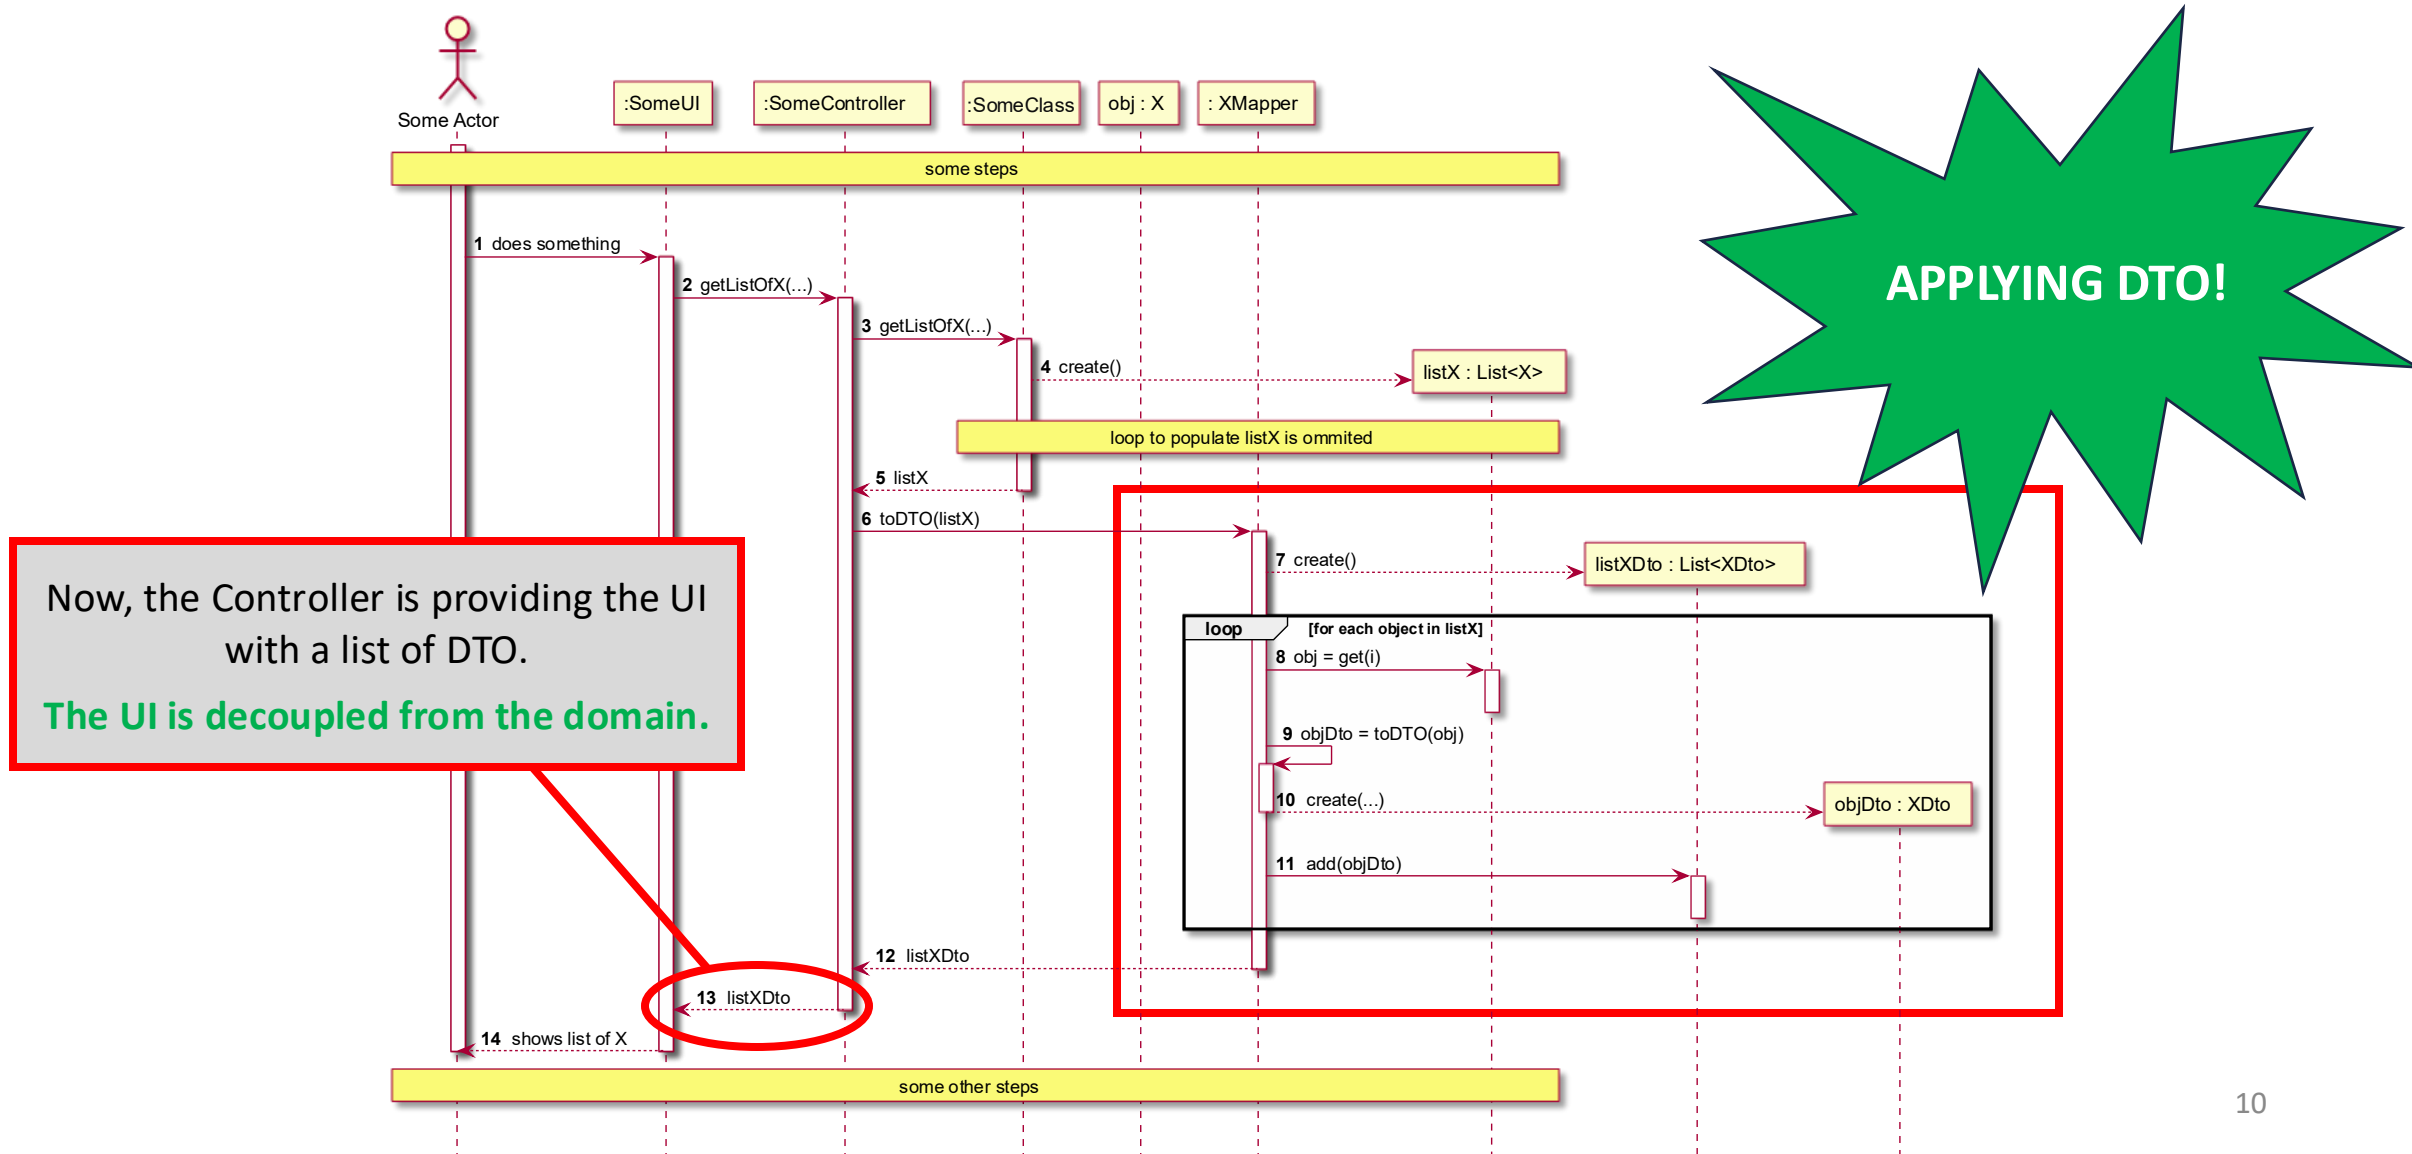

# UI ← Domain: Providing a List of DTO (2/2)


- The **Controller acts as an intermediary** between the UI and the domain
- The Controller does not have the responsibility to process data, but knows who does – it **tells the Mapper to process the data** (e.g. convert to DTO)

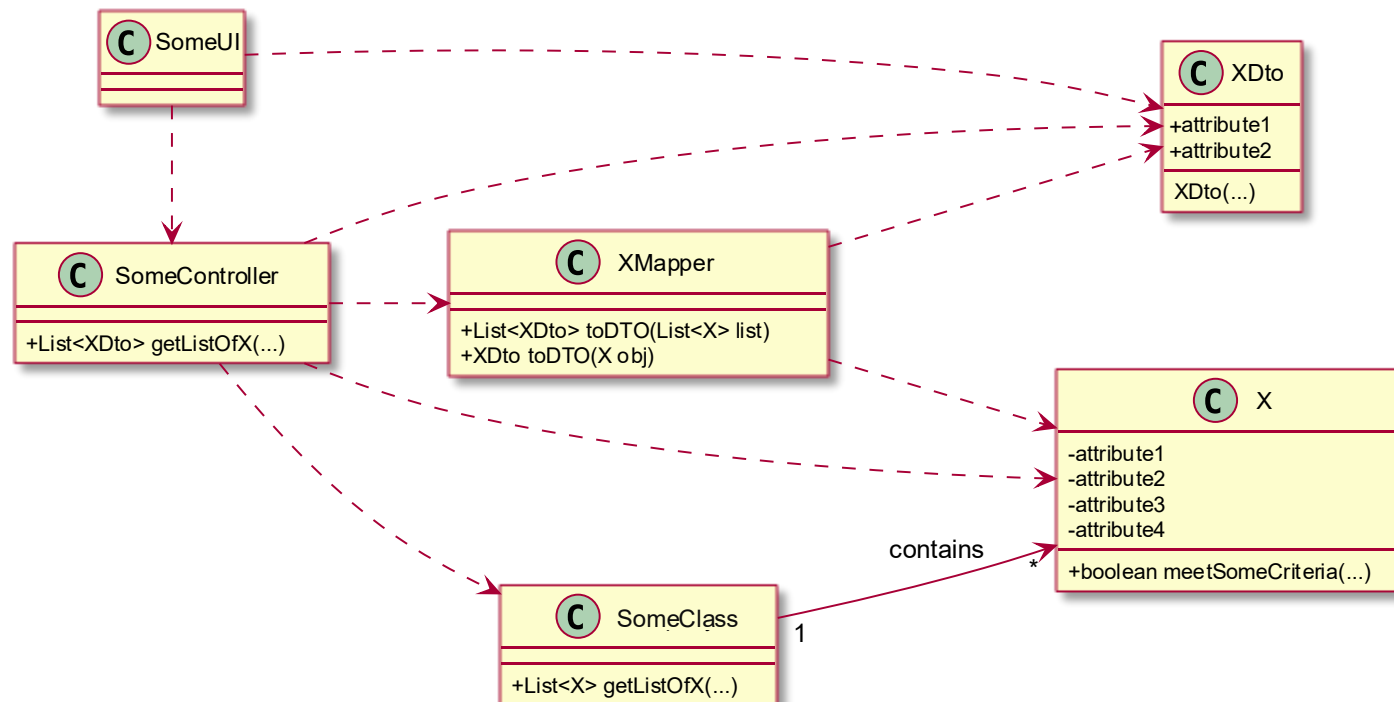


# From the UI Layer to the Domain Layer

Sending user-inputted data to the domain


# UI → Domain: Sending data to Domain – NO DTO

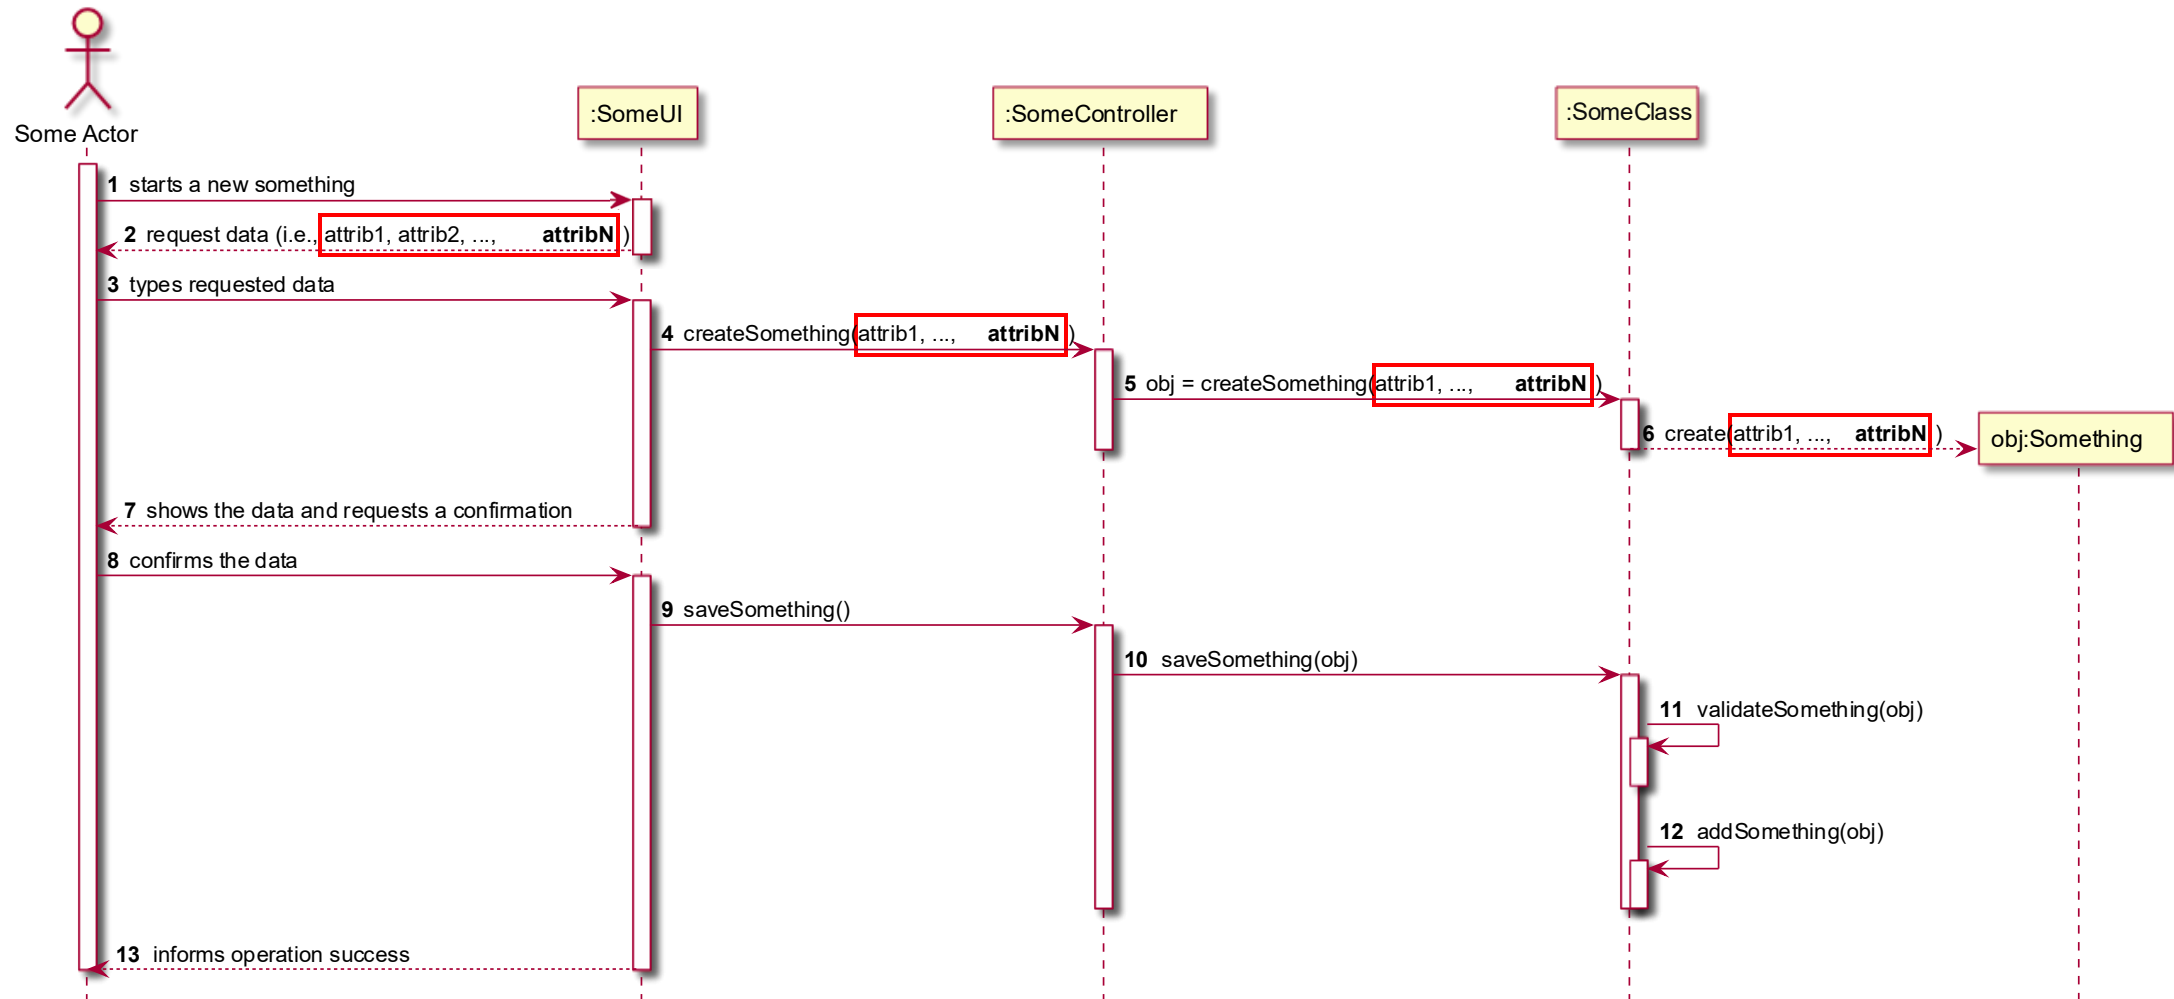


# UI → Domain: Sending data to Domain (v1)

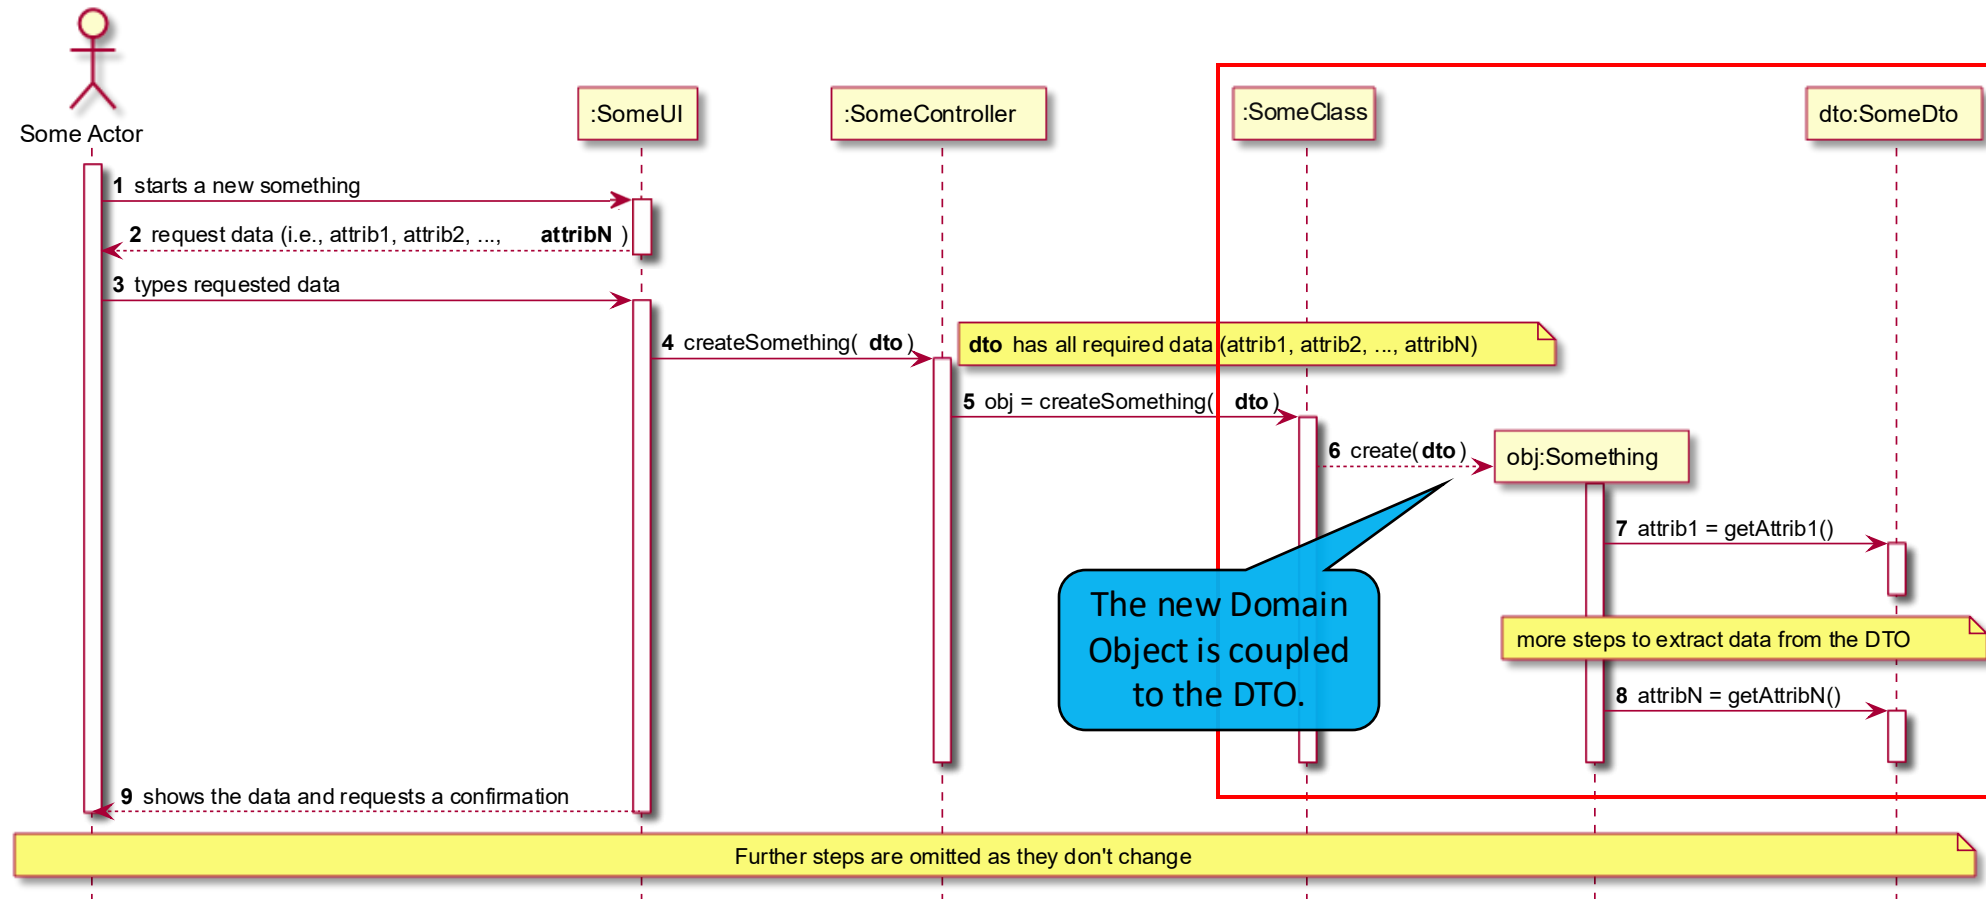

# UI → Domain: Sending data to Domain (v2)

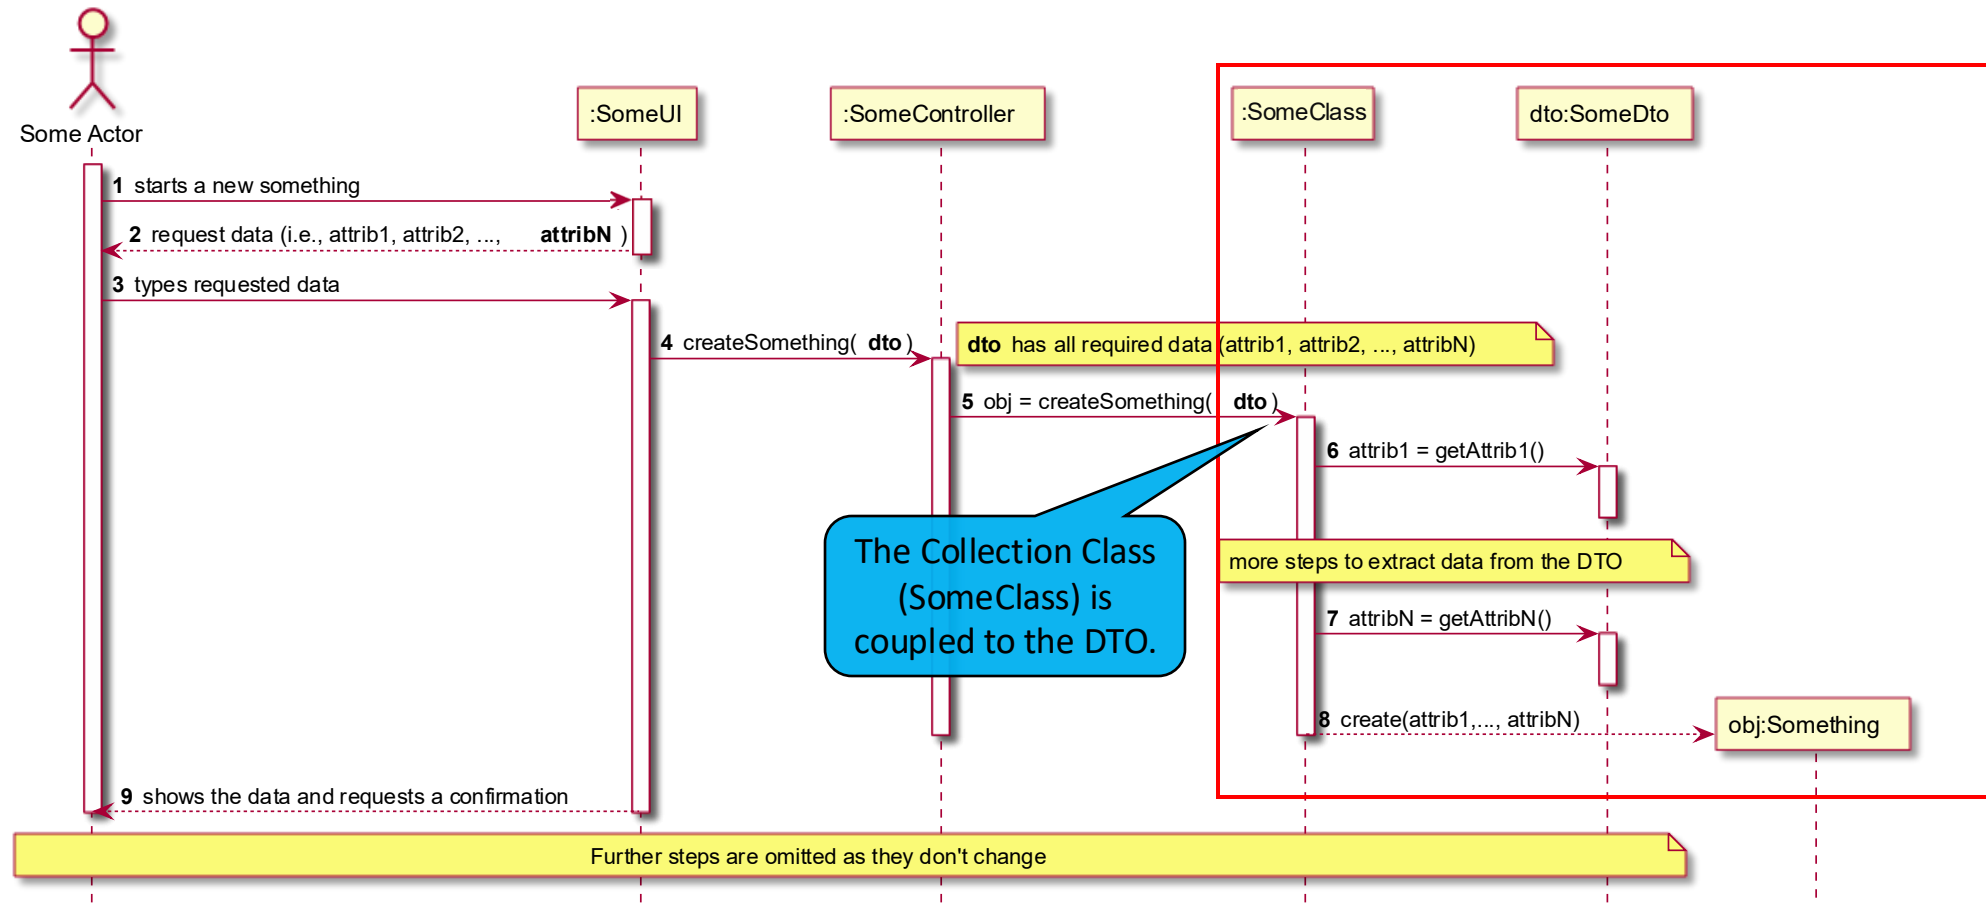

# UI → Domain: Sending data to Domain (v3)

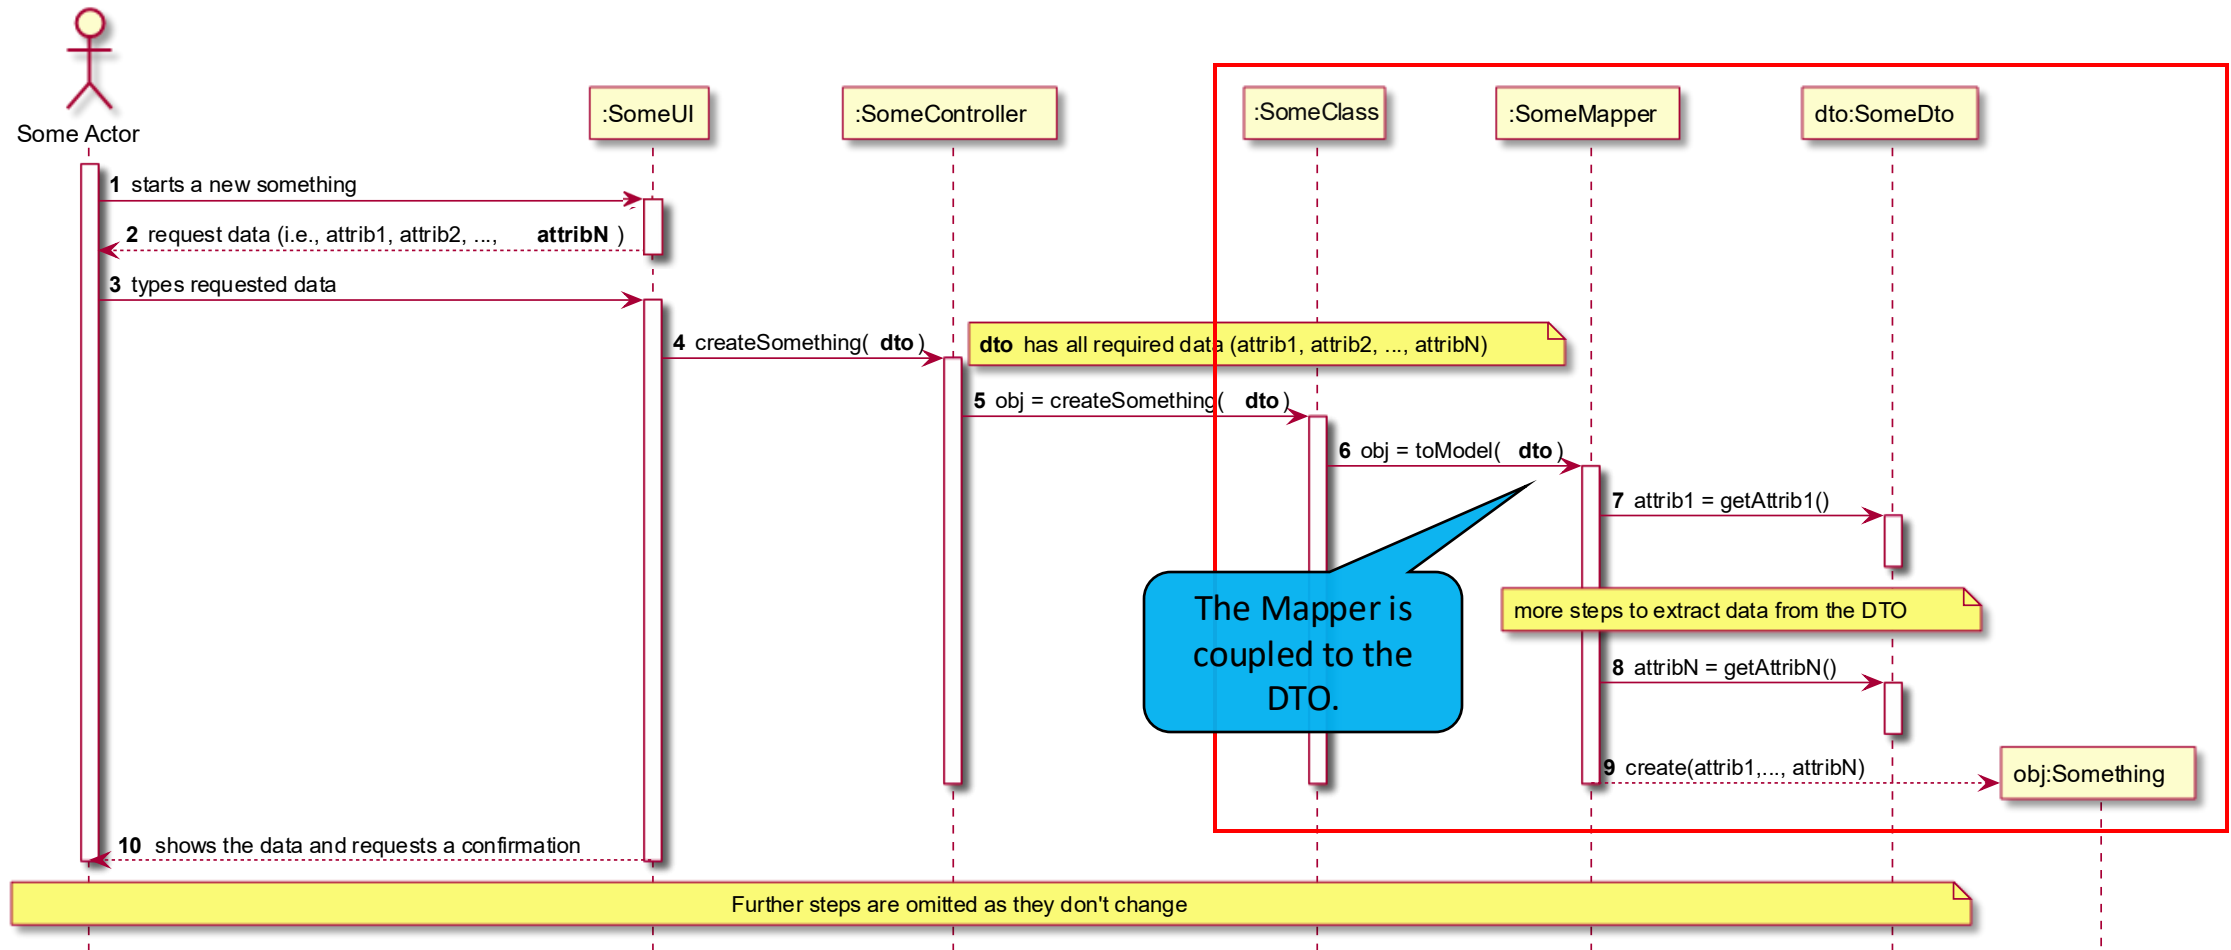



# Comparison: v1 vs. v2 vs. v3

- Similarities:
  - The adopted (type of) **DTO is known and expected by the Domain Layer**
  - The Domain Layer **knows how to manipulate** the DTO
  - The Controller compels the UI to send the **expected (type of) DTO**
  - The UI **instantiates the DTO directly**, with the data entered by the user (although not depicted in the previous diagrams)
  - The DTO is used to **stabilize the headers** of involved methods and constructors and to enhance (design and code) readability of such methods/constructors
- The main difference is whether to use (or not) a Mapper
  - On **v1**, the **object being created extracts the data** it needs from the DTO
  - On **v2**, **SomeClass extracts the data** to be able to create the intended object
  - On **v3**, **the data is extracted by a Mapper**, which creates the intended object by delegation from SomeClass (which was previously responsible for creating the object)

# Summary

- Use DTO to **reduce the coupling** between layers and increase modularity, reusability and maintainability
- Applying DTO from the Domain Layer to the UI Layer
  - The Domain Layer may not know the exchanged DTO → Only the Controller knows it
  - The DTO provided by the Controller may meet some specific UI needs
  - Immutable domain objects can be used as DTO
- Applying DTO from the UI Layer to the Domain Layer
  - Usually, the Controller compels the UI to send the DTO expected by the Domain Layer
  - In more complex scenarios, the UI may send a DTO (of *TypeX*) to the Controller, which in turn transforms it (using a Mapper) into another DTO (of *TypeY*) which is what the Domain Layer expects
- Use DTO wisely and only in scenarios where it brings some clear advantage – **avoid over-engineering!**

# Bibliography

- Fowler, M. (2003) Data Transfer Object. Available on:  
<https://martinfowler.com/eaCatalog/dataTransferObject.html>
- Fowler, M. (2003). UML Distilled (3rd ed.). Addison-Wesley. ISBN: 978-0-321-19368-1
- Freeman, E., & Robson., E. (2021). Head First Design Patterns: Building Extensible and Maintainable Object-Oriented Software (2nd ed.). O'Reilly. ISBN: 978-1-492-07800-5
- Larman, C. (2004). Applying UML and Patterns (3rd ed.). Prentice Hall. ISBN: 978-0-131-48906-6